

PK150tt



PK150tt

SLIDING SYSTEMS

Energy efficiency


Uw (W/m²K): 1,1

Categories achieved at test centre

Air permeability: HRN EN 12207:2017 - 4

Water tightness: HRN EN 12208:2001 - 9A

Wind resistance: HRN EN 12210:2016 - C5/B5

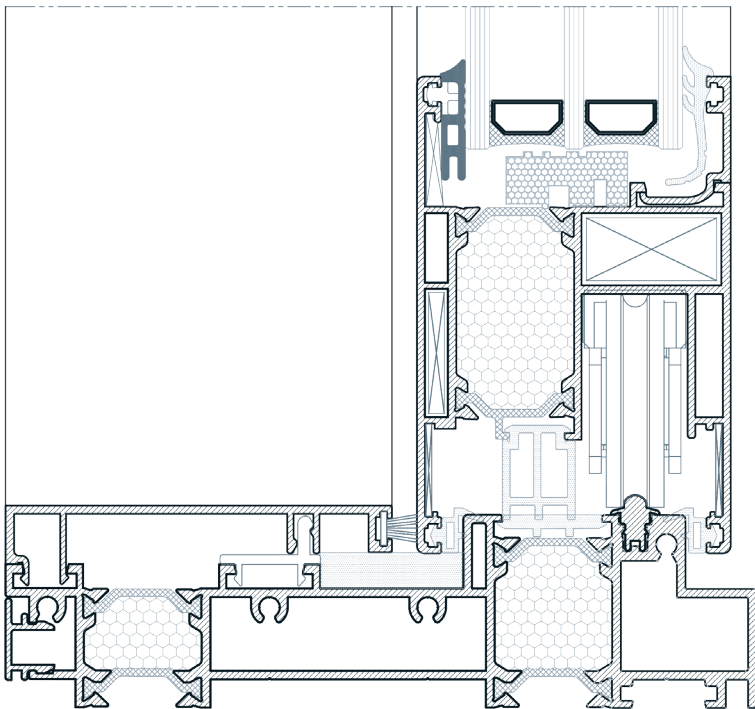

Glazing infill (mm):

22-48

Frame (mm):

156

Sash (mm):

65

Max weight:

400kg

Surface treatment options:

Colour powder coating Anodized

Extrusion alloy:

6060 T6

Polyamide strip length (mm):

24,5

Gaskets:

EPDM

EPDM+foam

